



VS12-LE-S70

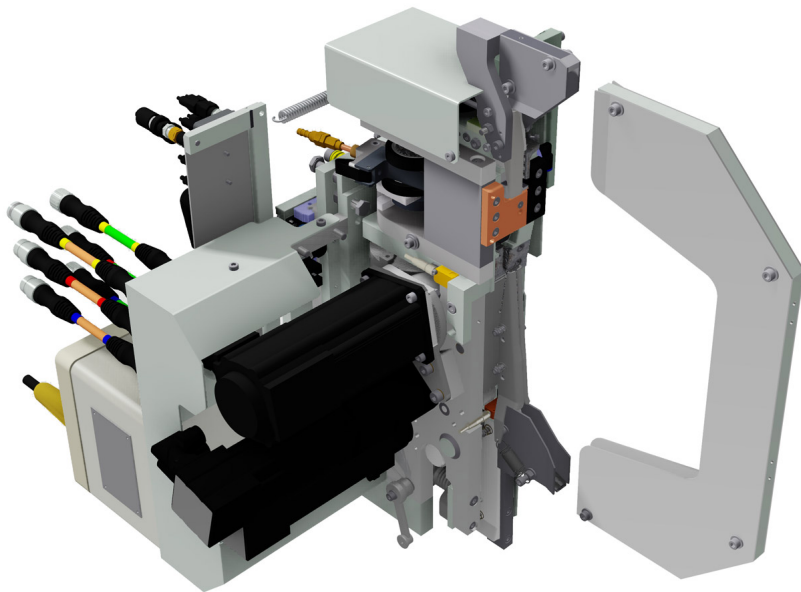

Contact

Edward McGinty
704-663-2490
sales@titanstrapping.com

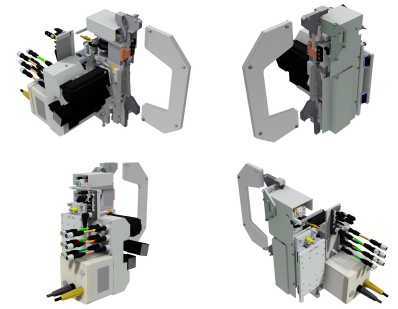

The VS12-L series

As the VS11-L series, also the VS12-L strapping aggregate is either powered electro-pneumatically or 100% electrically. To increase the service availability of our strapping aggregates the drive mechanism of the VS11-L and VS12-L series is identical, except the sealing unit itself which is adopted to the joint technology

With the new VS12-L strapping aggregate range TITAN offers its customers brilliant technical features for load security with steel strapping.

Two versions of VS12-L steel strapping aggregates are available: The VS12-L LD for light-duty applications and the VS12-L HD for heavy-duty applications.

Absolutely unique, strap thickness up to 1.0 mm (0.040") MEGABAND[®] can be handled with this aggregate

Technical Data

Kind of drive	Electro pneumatic
Tension force	1,000 - 10,000 N (adjustable)
Control voltage	24 V
Welding voltage (TITANARG [®])	400 V ; 460 V
Strap conveying speed	appr. 11.8 ft/s with 0.02 - 0.031 in strap thickness
Dimensions	16.1 x 17.7 x 22.4" (L x W x H)
Weight	264.5 lb
Gas consumption	appr. 2 l per seal

Temperature range (Hot / Cold)	Cold
--------------------------------	------

Strap/Joint

Type of strap	Steel strap
Strap	Automatenband MEGABAND® Megaflex
Strap width	1/2" ; 5/8"
Strap thickness	0.02 - 0.025"
Kind of seal	TIG welding joint
Sealing strength (depending on strap quality, strap dimensions)	approx. 80 - 90% of the strap breaking load

Minimum bearing area

Expansive package	2.8 in
Slit coil ring	3.2 in
Hexagon pipe bundle	3.3 in
Round package	Ø 15.7 in

Application

Bundling, stacking and securing of packages such as slit coils, sheet packages, structural timber, profile bundles etc.
