


MAXI-R160



Contact

Judy Riddle
704-663-2490
jriddle@titanstrapping.com

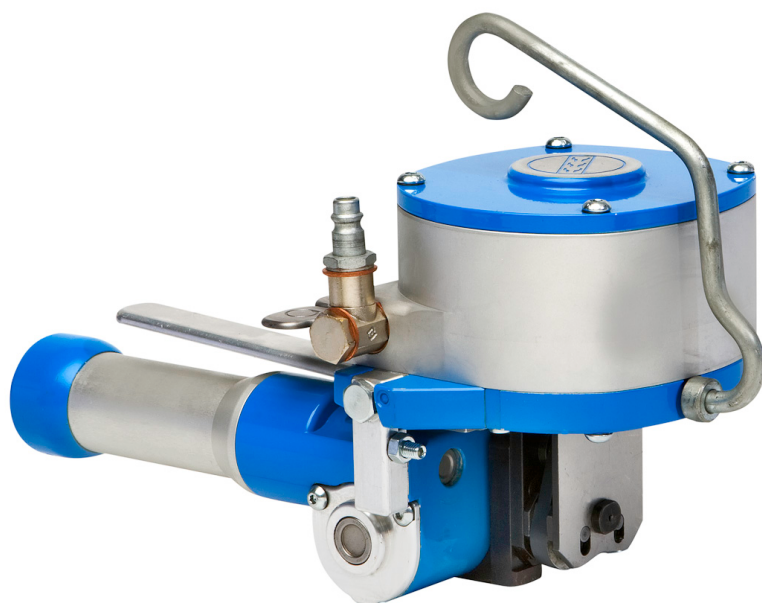

Pneumatic strapping tool for steel strap

01 Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua.

02 At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet.

03 Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua.

04 At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet.

05 Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua.

Technical Data

Kind of drive (tensioning)	Pneumatic
Tension force	max. 4,000 N (adjustable)
Kind of drive (sealing)	Pneumatic
Seal (Type)	RS 13 ; 16 ; 19
Strap feeding speed	0.36 ft/s
Dimensions	12.6 x 5.7 x 8.7" (L x W x H)
Weight	9.9 lb

Air pressure	max. 4.0 bar flow pressure (for 1/2 " strap) max. 5.0 bar flow pressure (for 5/8 " strap) max. 6.0 bar flow pressure (for 3/4 " strap)
Air consumption (during tensioning)	5 NI / s
Air consumption (during sealing)	4 NI / s
Cross-section	G 1/4 "
Handarm vibration	information currently not available
Noise level	76 dB (A)

Strap/Joint

Type of strap	Steel strap
Strap	Automatenband MEGABAND [®]
Strap width	1/2" ; 5/8" ; 3/4"
Strap thickness	0.016 - 0.024" (for Automatenband) 0.016 - 0.025" (for MEGABAND [®])
Kind of seal	Seal-joint (single notch)
Sealing strength (depending on strap quality, strap dimensions)	up to approx. 50% of the strap breaking load

Application

Strapping of pipes and coils between coilers with a circular blank distance from 6.3 in.