



VK10-K120-19B

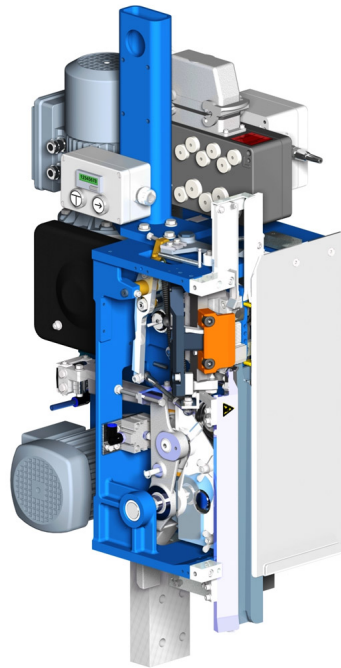

Contact  
 Edward McGinty  
 704-663-2490  
 sales@titanstrapping.com



**Specialist for expansion**

The VK10-K120-19B is the exotic member of the family. Its technology is based on the proven features of the VK10 series.

However, this model does not need a tension motor resulting in an extremely slim design. No tension motor - how is that supposed to work? The VK10-K120-19B is the specialist for the fibre industry and has a special head for strapping pressed bales.

These bales develop strong expansionary forces; the strap tension is produced by the strapped product itself. Anyone working in the fibre industry and dealing with such bales daily knows that the acting forces are so enormous that they demand maximum joint strength.

The VK10-K120-19B shows superior and reliable performance even under high pressure.

**Technical Data**

Kind of drive	Electric
Tension force	max. 300 N (depending on strap)
Mains voltage	400 V AC / 50 Hz
Control voltage	24 V DC
Connected load	0.75 kW
Current consumption	4 A
Strap conveying speed	approx. 9.8 ft/s (depending on strap thickness)
Dimensions	12.7 x 37.7 x 19.1" (L x W x H)

Weight	209.4 lb
--------	----------

**Strap/Joint**

Type of strap	Plastic strap
Strap	PET
Strap width	5/8" ; 3/4"
Strap thickness	0.028 - 0.053"
Kind of seal	Thermo-weld joint
Sealing strength (depending on strap quality, strap dimensions)	up to 90% of the strap breaking load

**Minimum bearing area**

Expansive package	4.7"
-------------------	------

**Application**

Especially for the fibre industry to strap compressed bales with strong expansive forces